




Mating stall

The mating stall is designed so that it provides ample space for both the sow and the staff while facilitating a strong stimulation of estrus and high reproduction performance. The stall is made with saloon gates making it easy to move the gilt or sow into the stall, while the staff can enter the stall without opening the gate. The stall design allows implementation of either a polymer concrete trough or a stainless suspended trough. The standard stall has prefabricated bars in front but can also be fitted with a front gate. The stall is hot dip galvanized. Stainless steel fixtures and solid steel rods supporting the stall secures a long durability.

**We call ourselves
pig experts and
we stand by that**

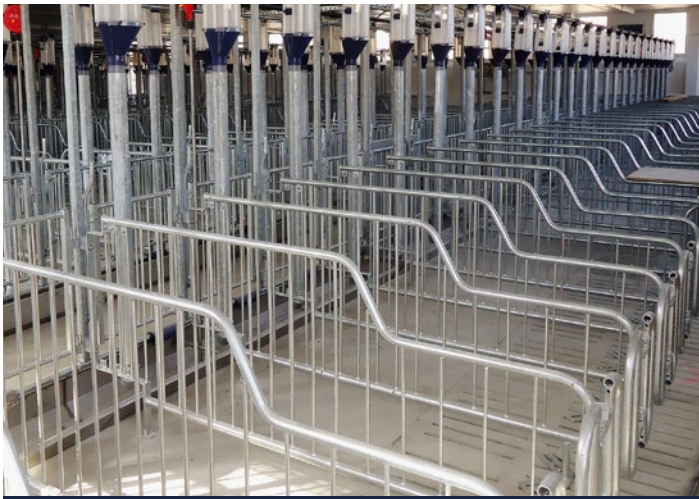

Mating unit



Mating stall with saloon gates



Mating stall with front exit



Boar gate

Facts

- Height: 100 cm
- Width: 55-70 cm
- Length: 240-250 cm
- Saloon gates with one-hand operation
- Water supply via one stainless pipe per two sows
- Stainless or polymer concrete trough
- Hot-dip galvanized surface and solid legs
- Fastening in floor with stainless steel bolts
- Front gate option

Vissing Agro A/S

Energivej 5, DK-8740 Brødstrup
www.vissingagro.dk



download
our
brochures

